



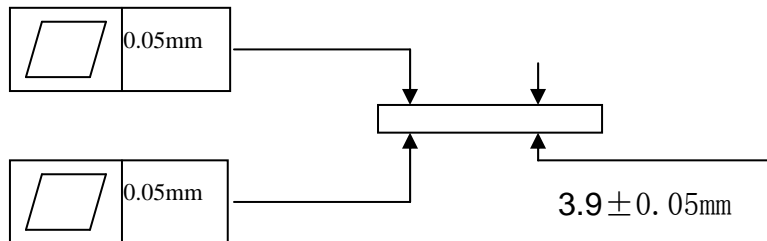



Specification

Item Number:	TEC1-06306
Device Outline	See picture below
Heat-shrink tube on the end of wire	Not available
Wire Criteria	1.20AWG UL, PVC insulated 2.Standard 105°C tinned copper wire 3.General length: 151±5mm 4.Length of tinning without outer sphere on the end of wire: 5±1.0mm
Resistance (ohms)	Environment Temperature 20°C, 1KHZ,0.95-1.05 (ohms)
Packing	Foam box
Printing	See picture below

Type A:Small

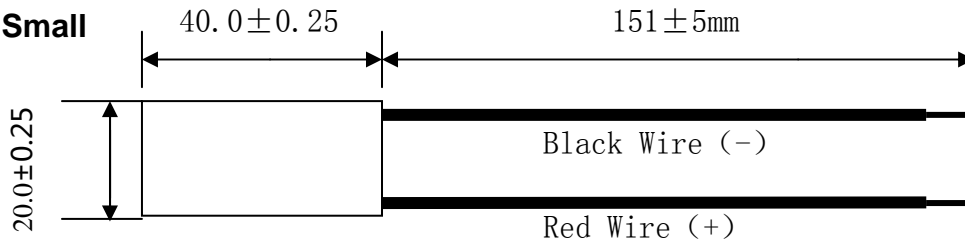

Type B:Big

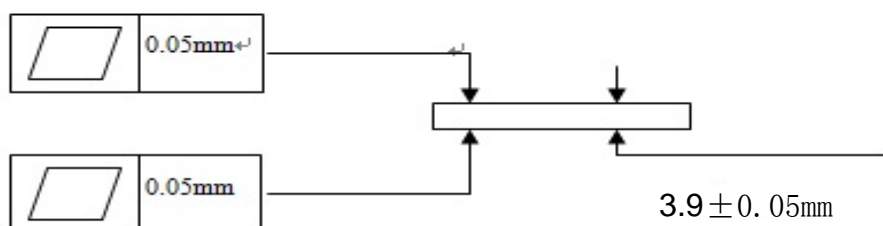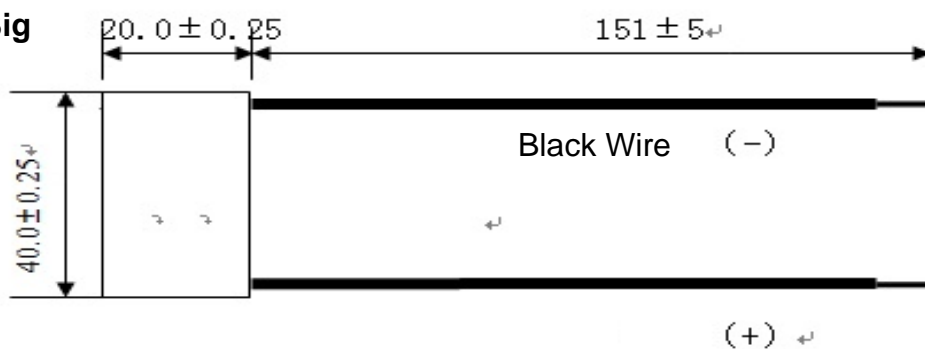



Specification

Other Requirement:

1. Working Temperature: $-55\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$
2. Assembled overwhelm force: 80lb/Sq.In.
3. P/N Couples: 63 couples
4. I_{max} : $6\pm 0.5\text{A}$ (7.6VDC)
5. V_{max} : 7.6VDC
6. Q_{cmax} : 42W (7.6VDC)
7. Resistance range: AC-R $0.95\text{-}1.05\Omega$ (Surrounding Temperature $20\text{ }^{\circ}\text{C}$ 1KHZ)
8. ΔT_{max} : $\geq 63\text{ }^{\circ}\text{C}$
9. Wire should be soldered on the hot side
10. 20AWG UL, PVC insulated, Standard $105\text{ }^{\circ}\text{C}$ tinned copper wire